



External Walls

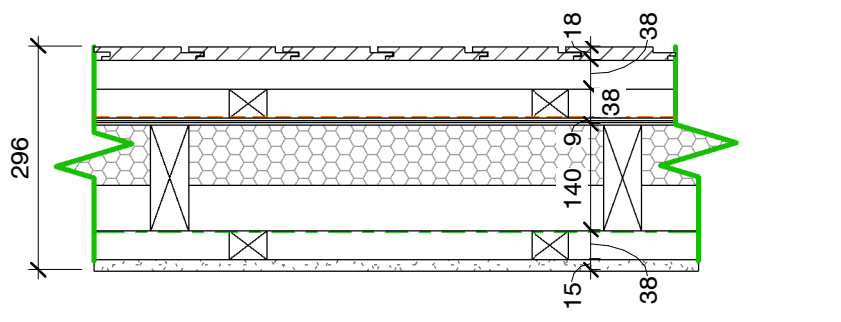

External Wall Type 1: EW1


18mm Vertical Timber Cladding
38mm Timber Battens (Horizontal)
38mm Timber Battens (Vertical)
9mm Sheathing Board
140mm Timber Frame filled
80mm Rigid Insulation with Stud
38mm Timber Services Batten
15mm Plasterboard

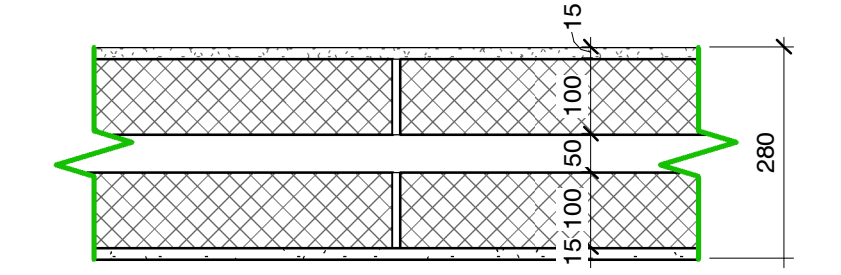

External Wall Type 2: EW2


15mm Plasterboard
100 x 440mm Block
50mm Cavity
100 x 440mm Block
15mm S&C Render

Internal Walls

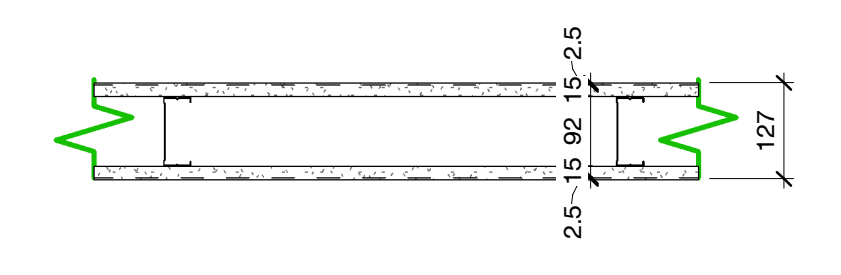


Internal Wall Type 1: IW1 (45dB) - As Clause K10/125A

15mm Gyproc SoundBloc with 2.5mm Thistle Multifinish
92mm S 50 C stud
15mm Gyproc SoundBloc with 2.5mm Thistle Multifinish

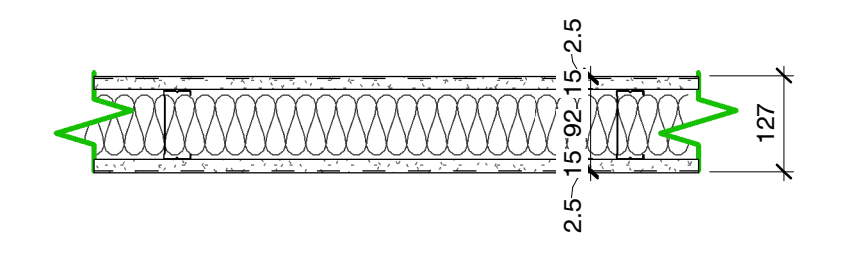


Internal Wall Type 2: IW2 (53dB) - As Clause K10/125B

15mm Gyproc SoundBloc MR with 2.5mm Thistle Multifinish
92mm S 50 C stud
15mm Gyproc SoundBloc MR with 2.5mm Thistle Multifinish
100mm Isover Modular Roll

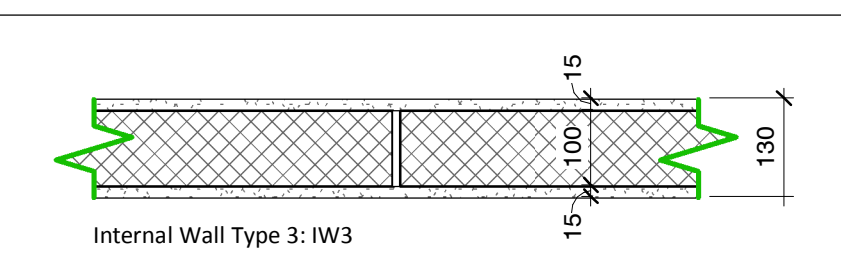


Internal Wall Type 3: IW3

15mm Plasterboard
100 x 440mm Block
15mm Plasterboard

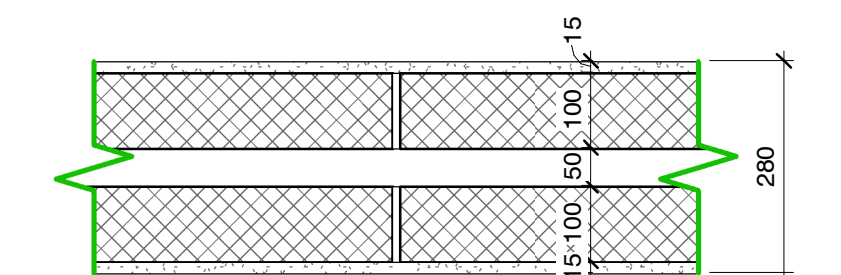

Internal Wall Type 4: IW4

15mm Plasterboard
100 x 440mm Block
50mm Cavity
100x440mm Block
15mm Plasterboard

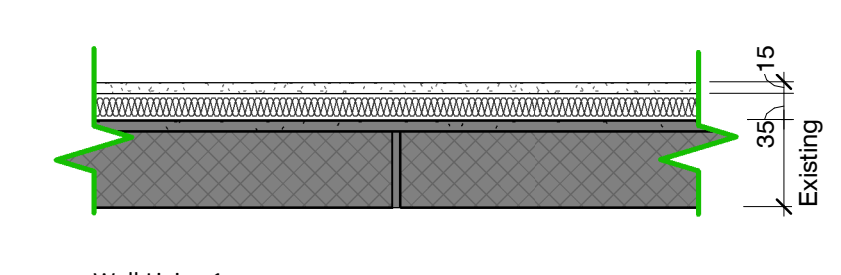


Internal Wall Type 5: IW5 - 57dB - Ref: As Spec K10/166A

Existing blockwork wall with 13mm plaster
35mm Gypframe GL1 Liner Channel
25mm Isover Acoustic Partition Roll (APR1200) between channels
15mm Gyproc SoundBloc

Internal Wall Type 6: IW6 (45dB) FD60 - As Clause K10/125C


15mm Gyproc SoundBloc F with 2.5mm Thistle Multifinish
92mm S 50 C stud
15mm Gyproc SoundBloc F with 2.5mm Thistle Multifinish

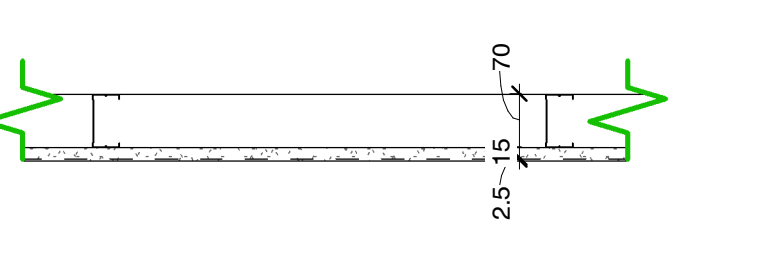


Internal Wall Type 6: IW7 - As Clause K10/125D

70mm S 70 C stud
15mm GTEC Wall board with 2.5mm Thistle Multifinish

Plastered Skim Finish

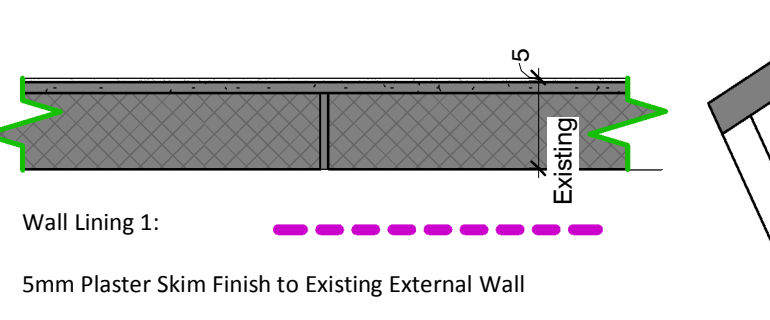

Wall Lining 1: 5mm Plaster Skim Finish to Existing External Wall

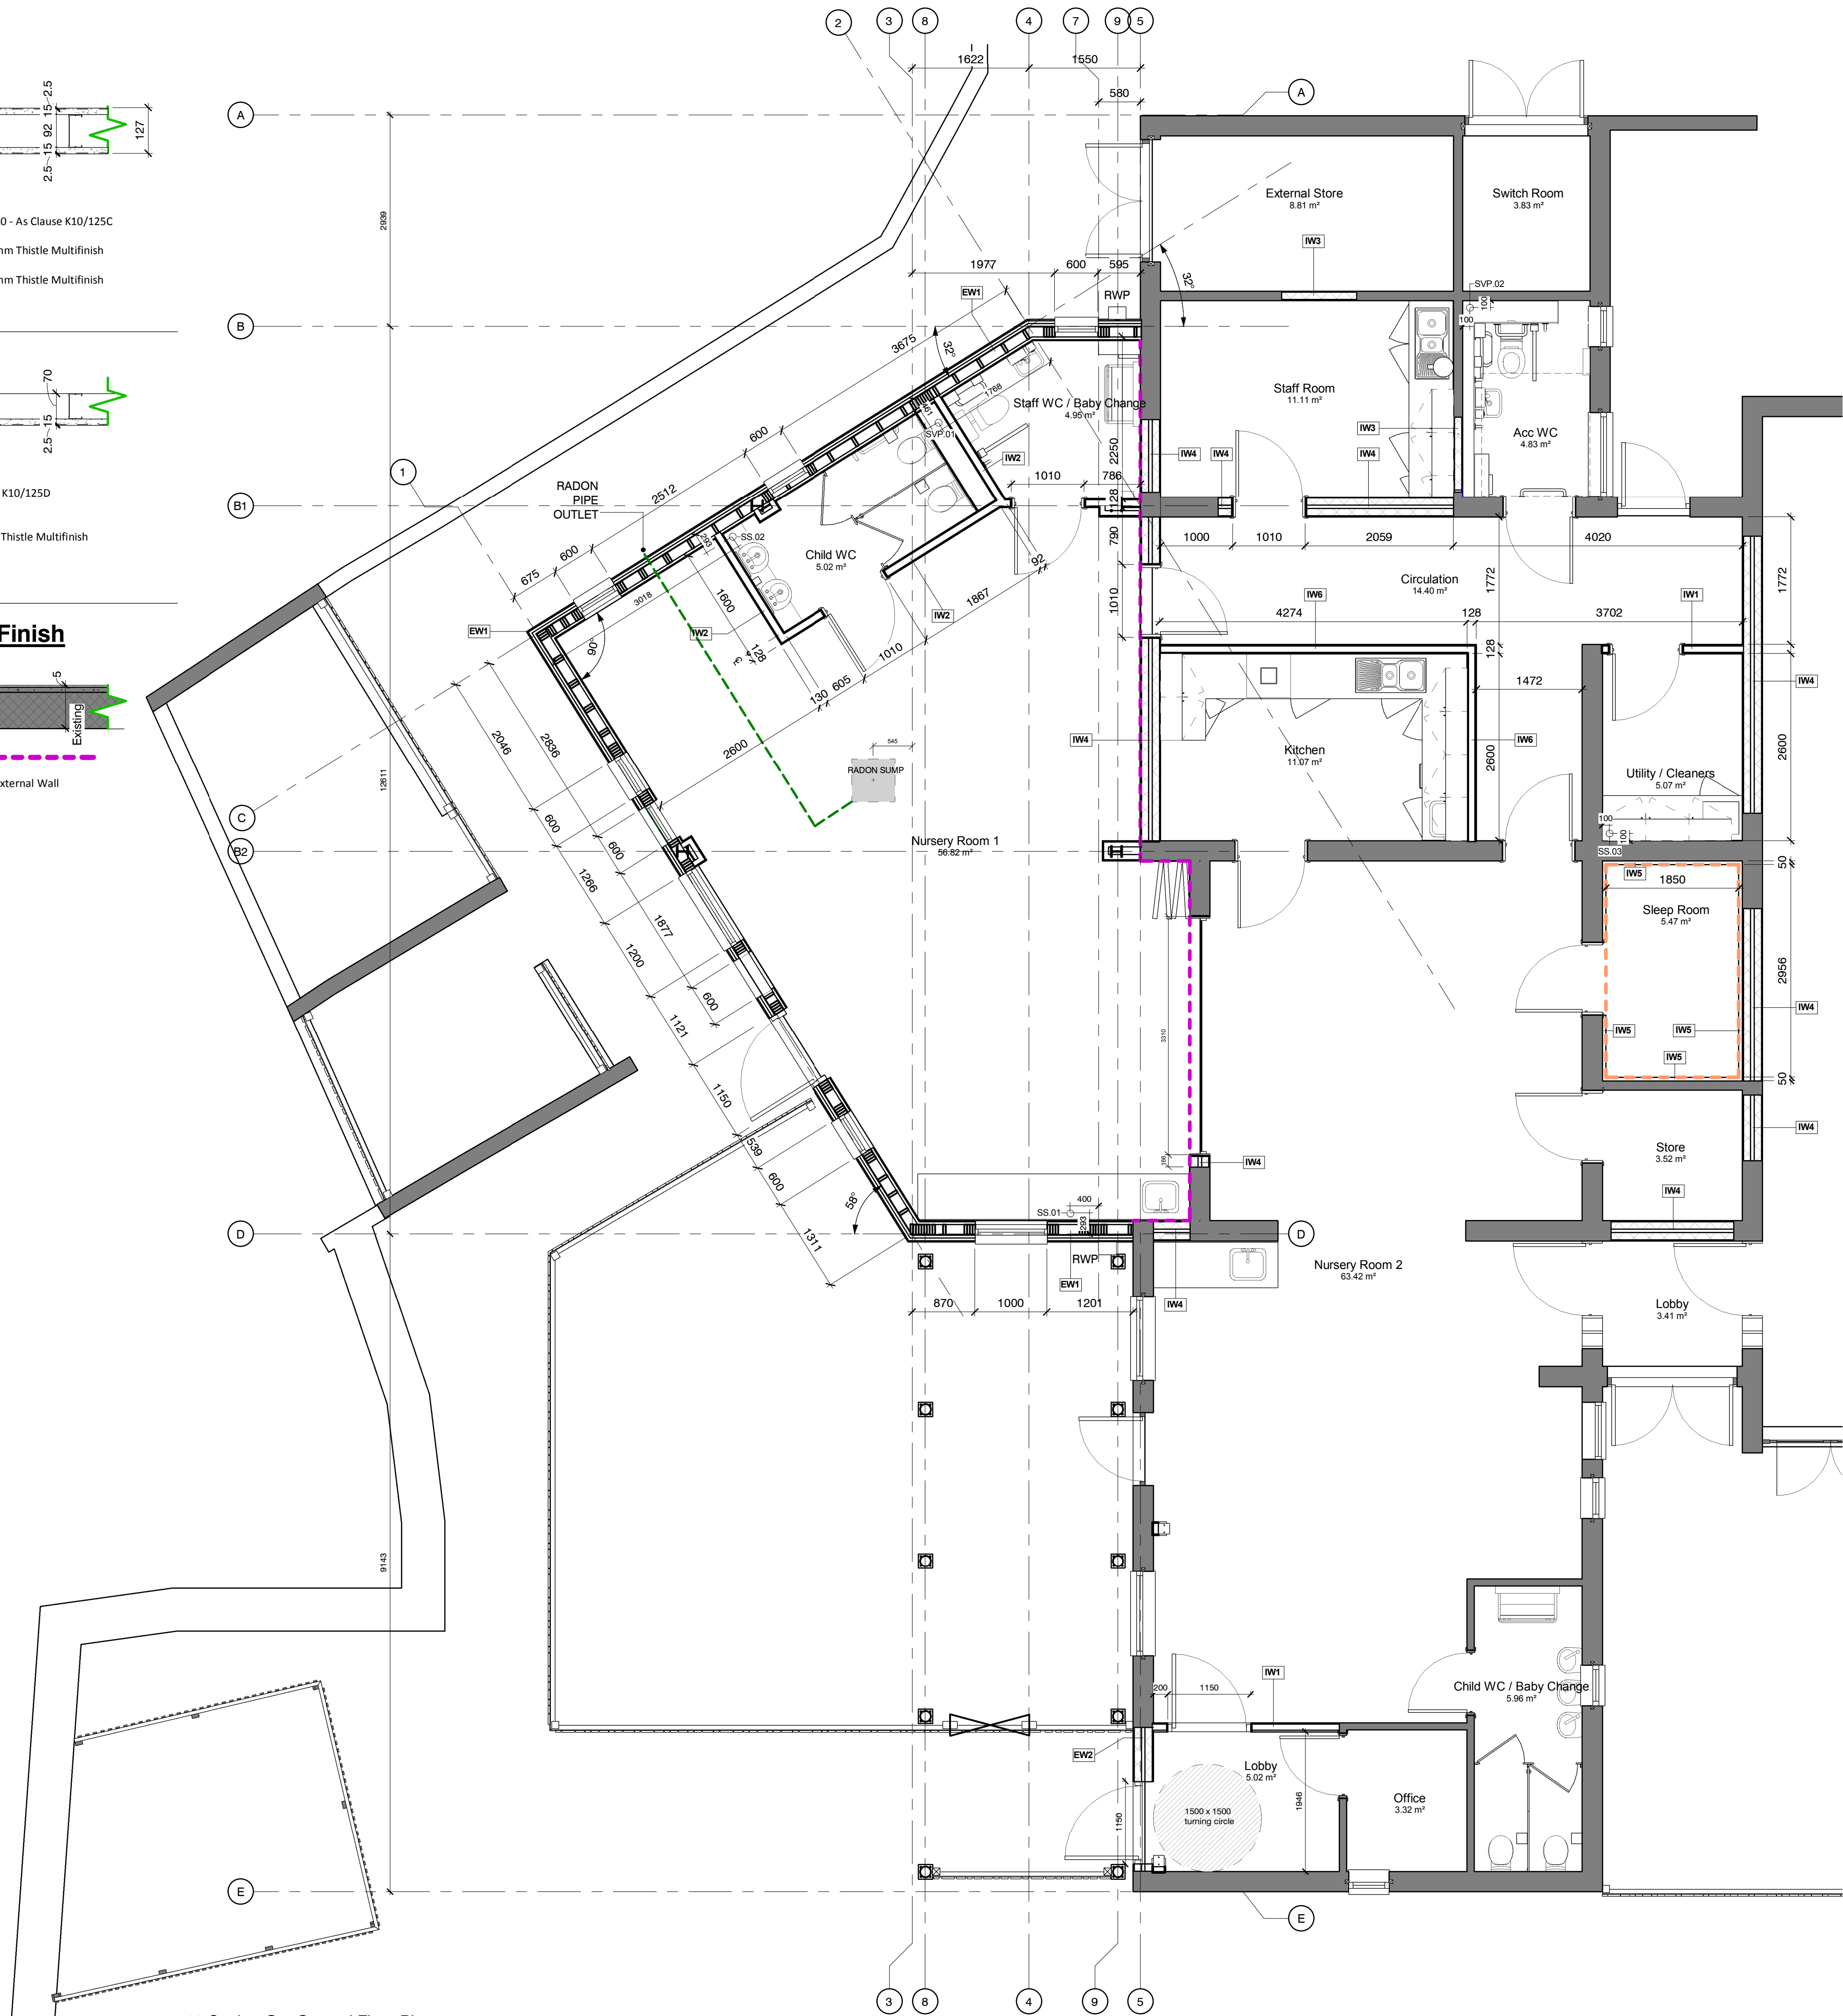

Responsibility is not accepted for errors made by others in scaling from this drawing.
All construction information should be taken from figured dimensions only.

0mm 50mm 100mm

D2	P26	15.11.2017	REISSUE FOR TENDER
D2	P24	13.11.2017	BUILDING CONTROL ISSUE
D2	P20	09.11.2017	TENDER ISSUE
S3	P16	10.10.2017	First issue - For client comment and review
S0	P13	09.10.2017	WIP Issue for Co-ordination

STATUS	REV	DATE	DESCRIPTION	REVISED BY
CLIENT				KS
Council of the Isles of Scilly				CHECKED BY
				GF
				ORIGINATOR NO
				150457

CONSULTANT

STRIDE TREGLOWN

www.stridetreglow.com © Stride Treglow Limited 2016

PROJECT

Carn Gwavel
Church Road
St Mary's
Isles of Scilly
TR21 0NA

DRAWING TITLE

Setting Out Plan - Ground Floor

SUITABILITY STATUS	SCALE
D2 : SUITABLE FOR TENDER	As indicated @ A1
PROJECT ORIGINATOR ZONE LEVEL TYPE ROLE CLASSIFICATION NUMBER	REVISION
150457-STL-XX-00-DR-A-XXXX-11001	P26