


- Notes:
- Doors to be laminate finish
 - Frames to be painted grey to match existing
 - Dulux high performance diamond eggshell
 - Colour to be specified
 - Manifestation to be added to all full height glazing in accordance with Approved Documents M and K.
 - Doors with Fire Rating and/or 'Smoke Seals' to be self closing. Where needed to be opened manually, the opening force at the leading edge of the door must not exceed 20N.
 - Dry lining installers to ensure plasterboard returns are incorporated into door jamb (and head) details without reducing the structural openings indicated.

Internal Door Type Elevations
1 : 20


Internal Door Schedule								
Mark	Type Mark	Width	Height	Fire Rating (minutes)	Smoke Seals	Acoustic Rating (dB Rw)	Finger Protection	Comments
IDG01	Type D	1150	2110	0	Yes	30	Yes	Controlled access, key pad from lobby with override on nursery side
IDG02	Type C	3270	2090	30	No	35	Yes	Lockable
IDG03	Type B	1010	2110	30	No	30	Yes	Lockable with internal thumbturn
IDG04	Type A	1010	2110	30	Yes	35	Yes	Blinds required, spec N10/240
IDG05	Type A	1010	2110	30	Yes	30	Yes	Controlled access, key pad from corridor with override on nursery side
IDG06	Type A	1010	2110	60	Yes	30	Yes	Lockable with internal thumbturn
IDG07	Type A	1010	2110	30	Yes	30	No	Lockable with internal thumbturn
IDG08	Type B	1010	2110	0	No	30	No	Bathroom cylinder and turn
IDG09	Type A	1010	2110	30	No	30	No	Lockable with internal thumbturn
IDG10	Type A	1010	2110	30	Yes	35	Yes	
IDG11	Type B	1010	2110	0	No	35	Yes	Bathroom cylinder and turn
IDG12	Type B	1010	2110	0	No	35	Yes	
IDG13	Type E	Site measure	Site measure	60		35	Yes	Controlled access, key pad from lobby with override on nursery side
IDG14	Type E	Site measure	Site measure	60		35		Lockable with internal thumbturn

Existing Internal Door Schedule				
Mark	Width	Height	Finger Protection	Comments
XID01	910	2110	No	To be lockable
XID02	910	2110	Yes - to be added	
XID03	910	2110		To be demolished
XID04	1500	2110		To be demolished
XID05	910	2110		To be demolished
XID06	810	2110		To be demolished
XID07	810	2110		To be demolished
XID08	810	2110		To be demolished
XID09	810	2110		To be demolished
XID10	1500	2110		To be demolished
XID11	910	2110		To be demolished

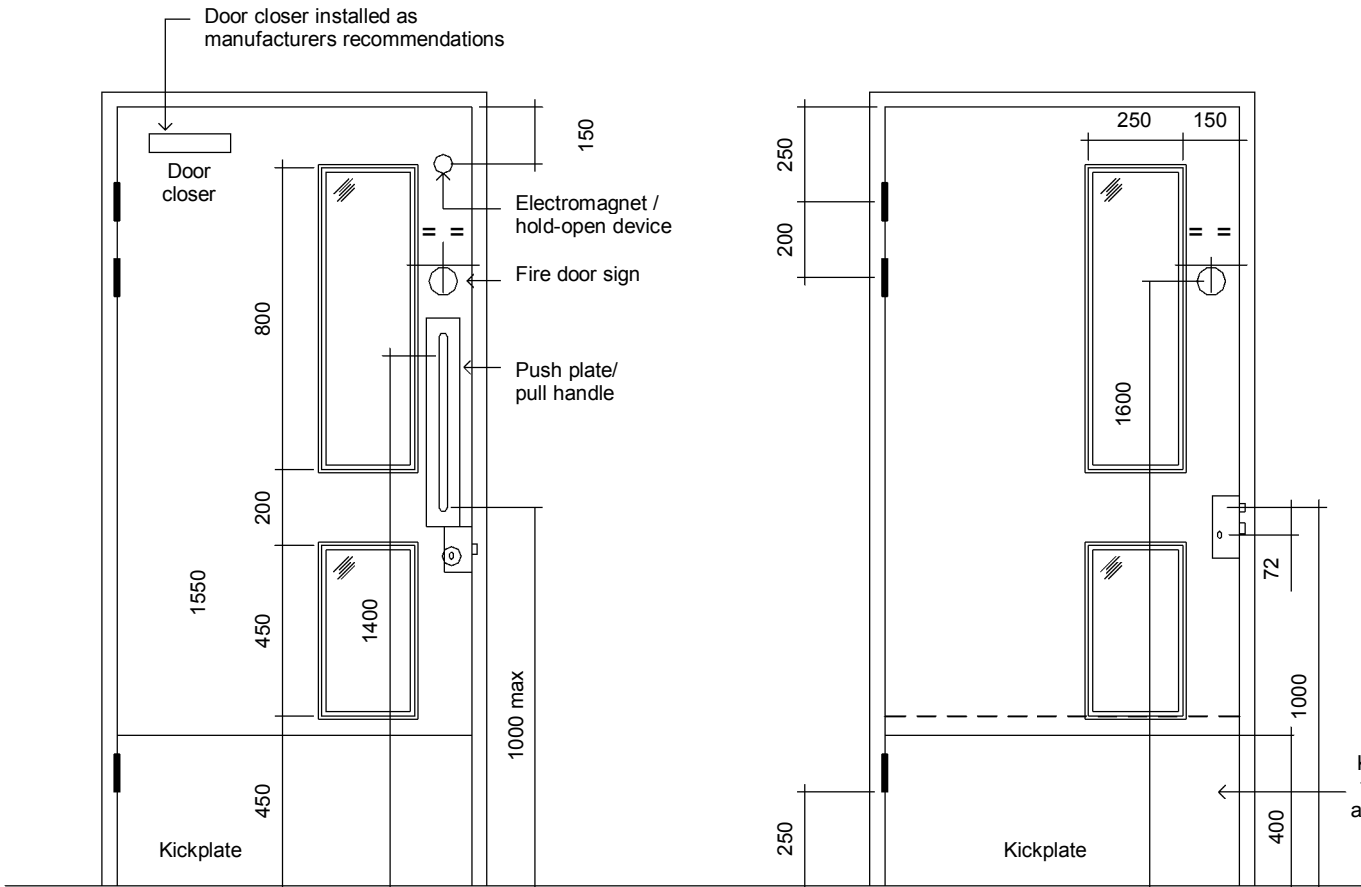


Typical Ironmongery and Vision Panel Positions

Internal Doors - Ironmongery Locations
1 : 20

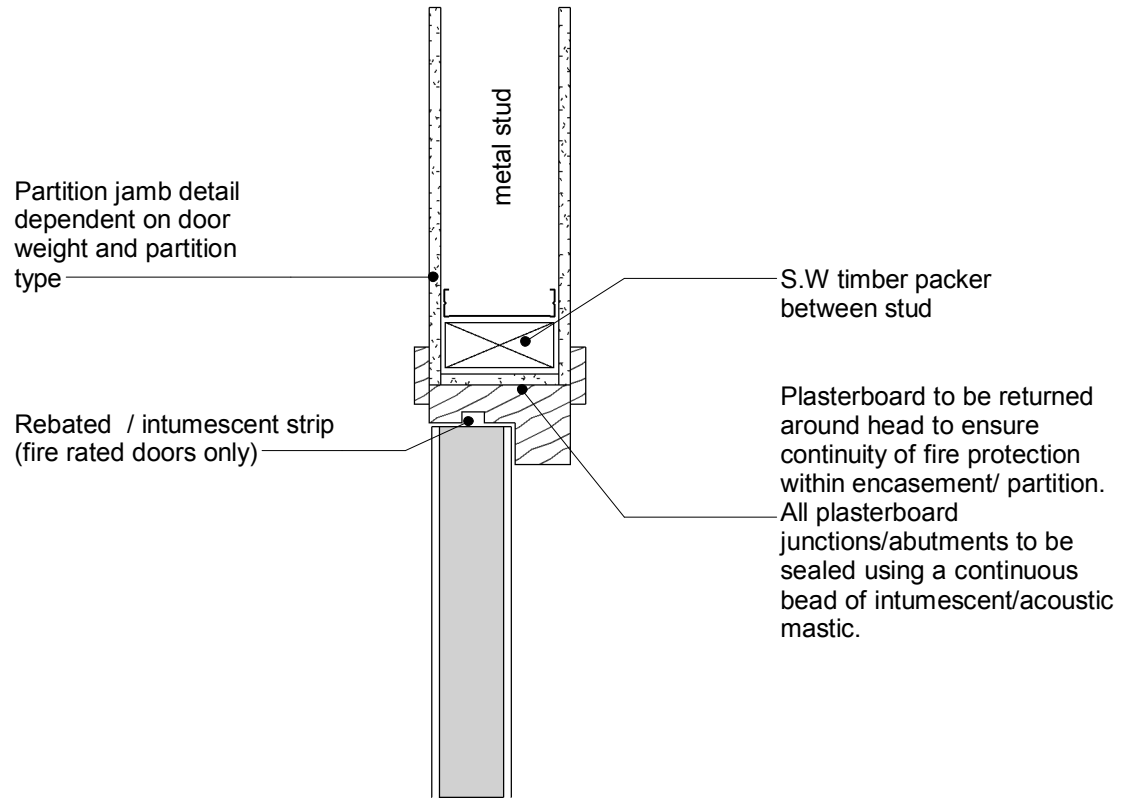

Typical Internal Door Head
1 : 10

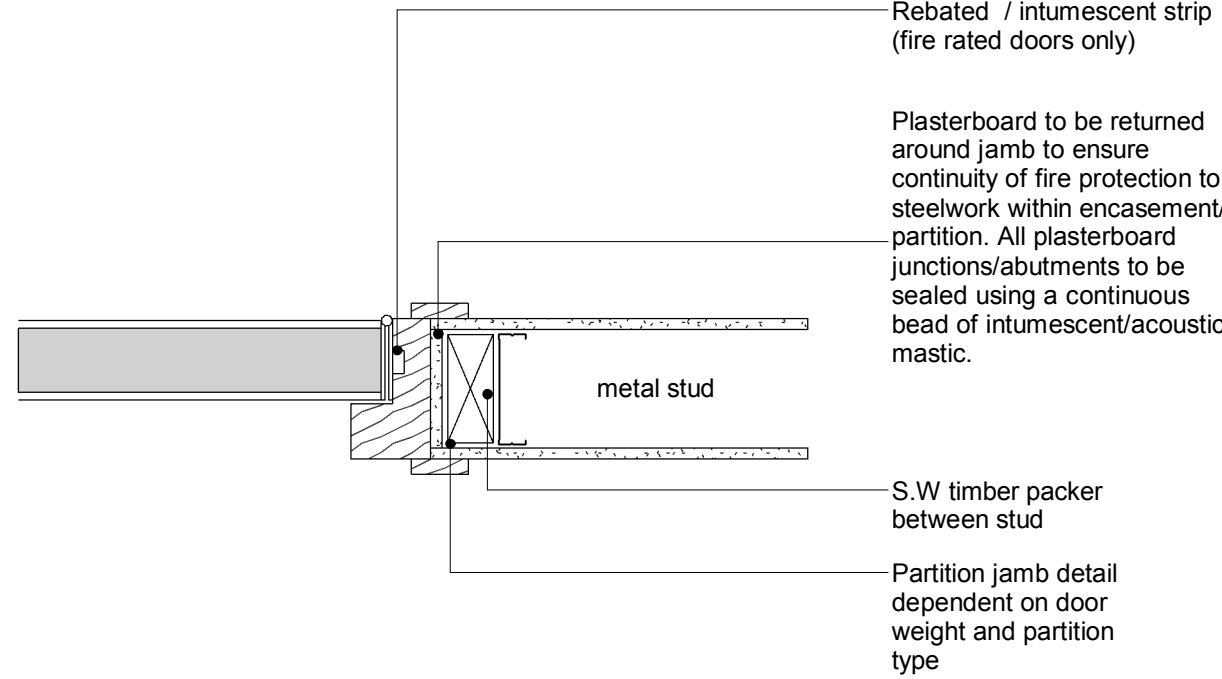

Typical Internal Door Jamb
1 : 10

D2	P26	15.11.2017	REISSUE FOR TENDER
D2	P24	13.11.2017	BUILDING CONTROL ISSUE
D2	P20	09.11.2017	TENDER ISSUE
S3	P18	24.10.2017	Building Control Issue
S3	P16	10.10.2017	First issue - For client comment and review
S0	P13	09.10.2017	WIP Issue for Co-ordination

STATUS	REV	DATE	DESCRIPTION	REVISED BY
CLIENT				KS
Council of the Isles of Scilly				CHECKED BY
				GF
				ORIGINATOR NO
				150457

CONSULTANT

STRIDE TREGLOWN

www.stridetreglown.com © Stride Treglown Limited 2016

PROJECT

Carn Gwavel
Church Road
St Mary's
Isles of Scilly
TR21 0NA

DRAWING TITLE
Internal Door Schedule

SUITABILITY STATUS	SCALE
D2 : SUITABLE FOR TENDER	As indicated @ A1
PROJECT ORIGINATOR ZONE LEVEL TYPE ROLE CLASSIFICATION NUMBER	REVISION
150457-STL-XX-XX-DR-A-XXXX-71002	P26