



1:50

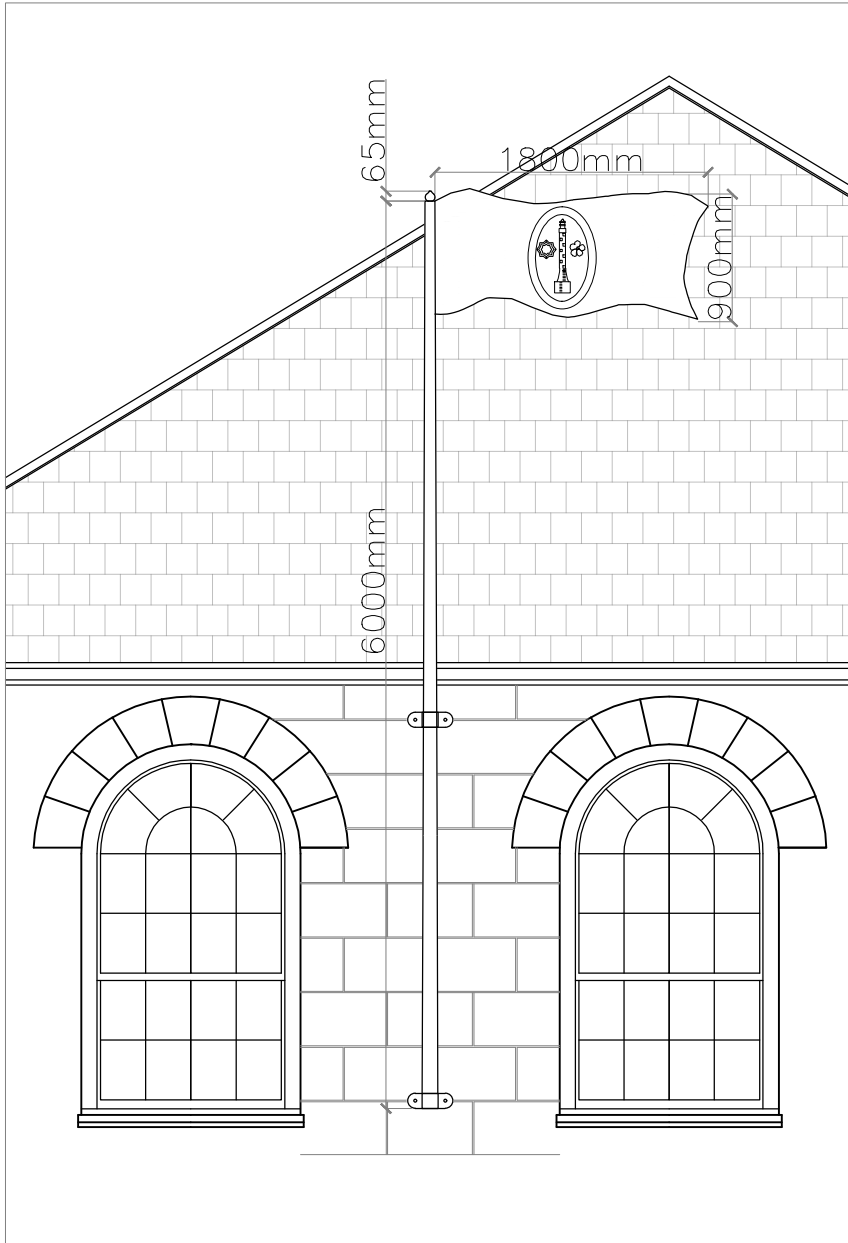


NOTE: The granite block spacing is diagrammatic and approximately to scale.

1:20

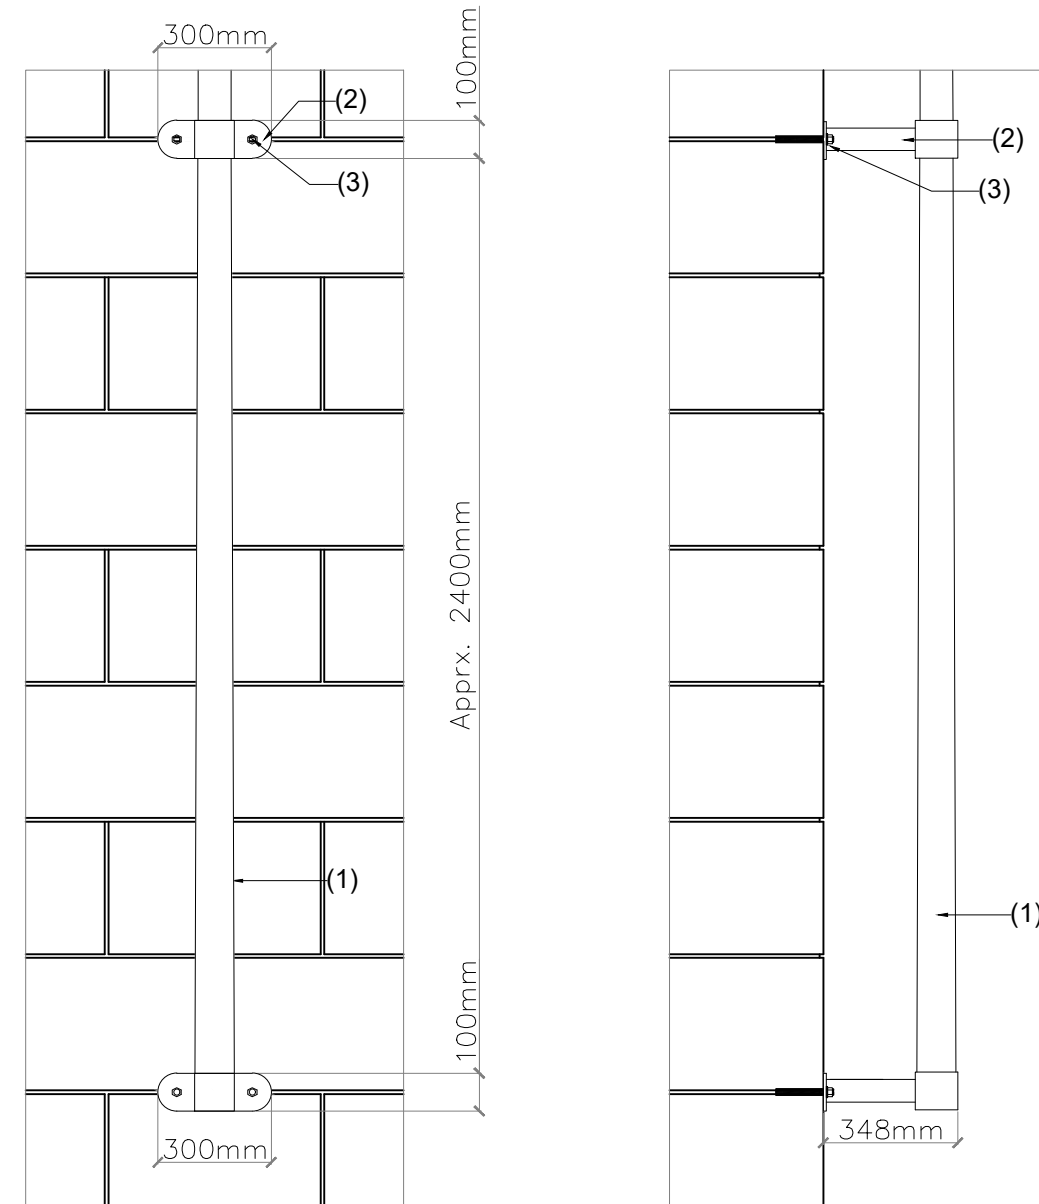

- (1) Heavy duty glassfibre and polyester resin flagpole. Apprx 2400mm spacing to suit mortar joint spacing. Holding brackets fixed through mortar joints.
- (2) Custom made galvanised steel holding brackets. 2nr brackets with 2nr fixings in each bracket (4nr fixings in total).
- (3) Stainless steel A4 (316) M12 Grade 8.8 threaded bar and washer with Rawl R-KEM II resin fixed through into the existing mortar joints.

1:10

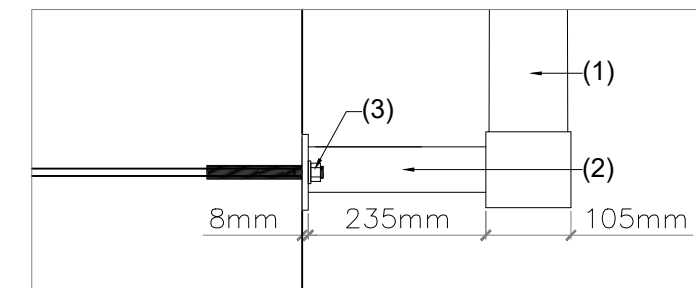

This drawing is the copyright of Currie & Brown Ltd.

Check all dimensions on site prior to project commencement. This drawing must be read in conjunction with all other drawings, details and specifications issues. Discrepancies between this and other drawings, details and/or specifications must be referred to the issuer.

RECEIVED

By Tom.Anderton at 10:08 am, Mar 21, 2025

B	09.01.25	Increase to flagpole throw distance. Relocation of second bracket
A	21.10.24	Fixing through mortar joints
Rev	Date	Description



Unit 6, Mills Bakery, Royal William Yard,
Plymouth, Devon PL1 3GE
Tel: 01752 278 100 Web: www.curriebrown.com

Project	
---------	--

Wesleyan Chapel Flagpole Installation

Title

Fixing Details

Client	
--------	--

Council of the Isles of Scilly

Date 17.09.2024

Drawn AH

Scale 1:50/1:20/1:10

Checked **AH**

Drwg No.
PL_4101565_WC_03

Rev
B